




ROUND FLANGETTE UNITS


SBPF 200 Series

Light Duty


Set Screw Locking

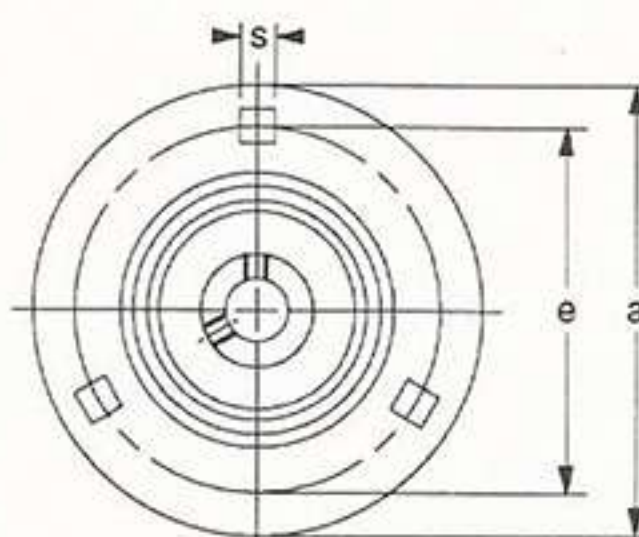

PF203 - PF207

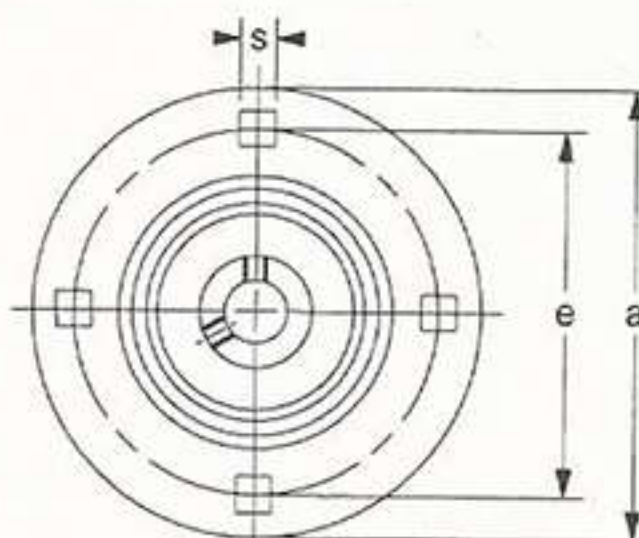



PF208

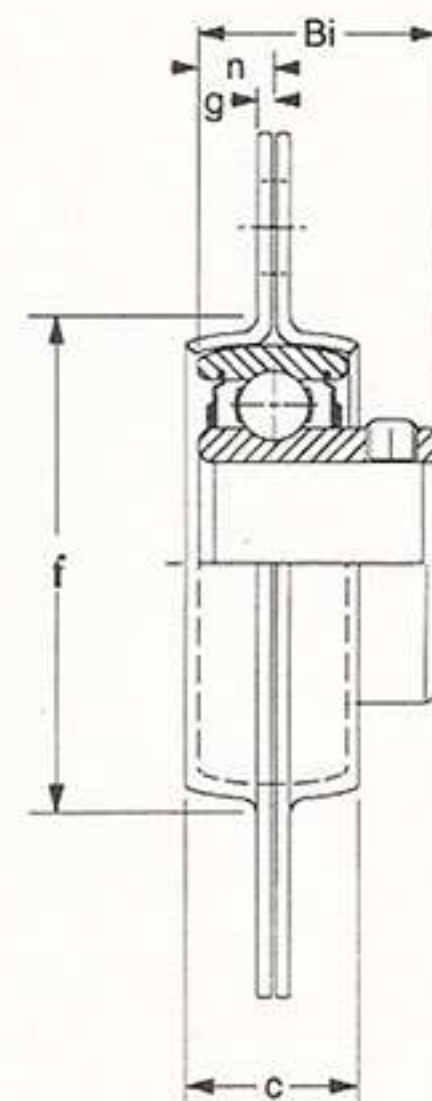


Unit No.	Shaft Dia.		Dimensions inch / mm								Bolt Size	Bearing No.	Housing No.	Weight Lbs kg
	In.	mm	a	e	g	c	s	f	Bi	n				
SBPF 201-8 202-10	1/2 5/8		3-3/16 81	2-33/64 64	0.079 2	9/16 14	9/32 7	1-59/64 49	0.866 22	0.236 6.0	1/4 M6	SB 201-8 202-10	PF203	0.660 0.30
SBPF 204 204-12	3/4	20	3-35/64 90	2-51/64 71	0.083 2.1	5/8 16	11/32 9	2-7/32 56	0.984 25	0.276 7.0	5/16 M8	204 204-12	PF204	0.726 0.33
SBPF 205 205-14 205-15 205-16	7/8 15/16 1	25	3-3/4 95	2-63/64 76	0.083 2.1	21/32 17	11/32 9	2-19/32 66	1.063 27	0.295 7.5	5/16 M8	SB 205 205-14 205-15 205-16	PF205	0.836 0.38
SBPF 206 206-17 206-18 206-19 206-20	1-1/16 1-1/8 1-3/16 1-1/4S	30	4-7/16 113	3-35/64 90	0.102 2.6	21/32 17	13/32 10	2-51/64 71	1.181 30	0.315 8.0	3/8 M10	SB 206 206-17 206-18 206-19 206-20	PF206	1.408 0.64
SBPF 207 207-20 207-21 207-22 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	4-13/16 122	3-15/16 100	0.102 2.6	3/4 19	13/32 10	3-3/16 81	1.260 32	0.335 8.5	3/8 M10	SB 207 207-20 207-21 207-22 207-23	PF207	1.804 0.82
SBPF 208 208-24 208-25	1-1/2 1-9/16	40	5-13/16 148	4-11/16 119	0.134 3.4	13/16 21	1/2 13	3-35/64 90	1.339 34	0.354 9.0	1/2 M14	SB 208 208-24 208-25	PF208	2.200 1




ROUND FLANGETTE UNITS **SAPF 200 Series** Light Duty Eccentric Collar Locking

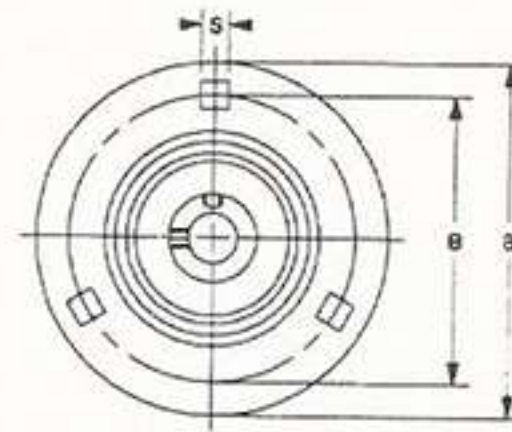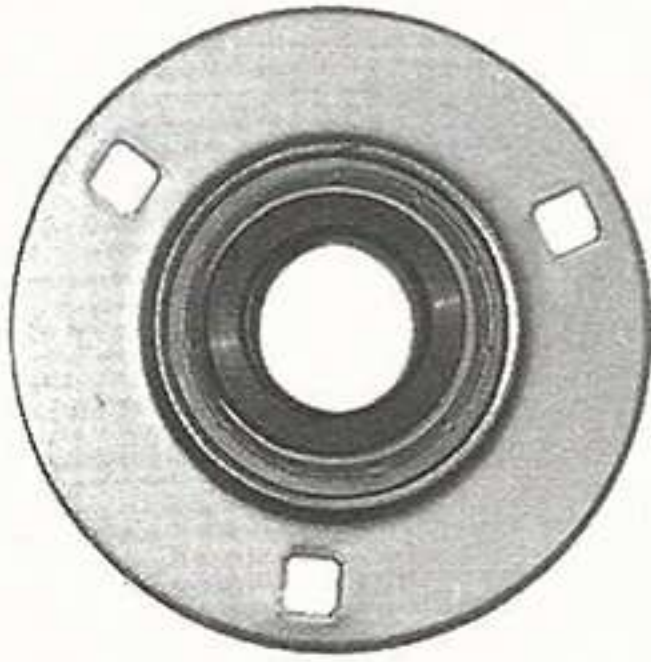

PF203 - PF207

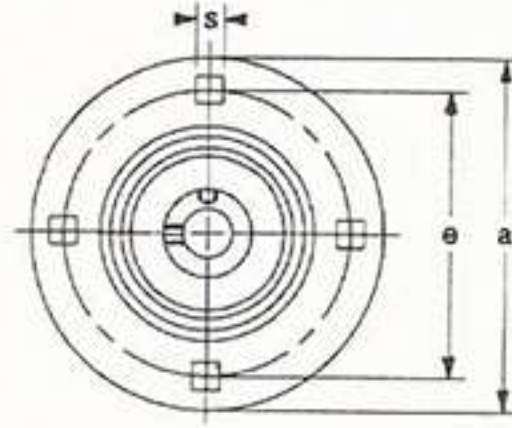

PF208 - PF210

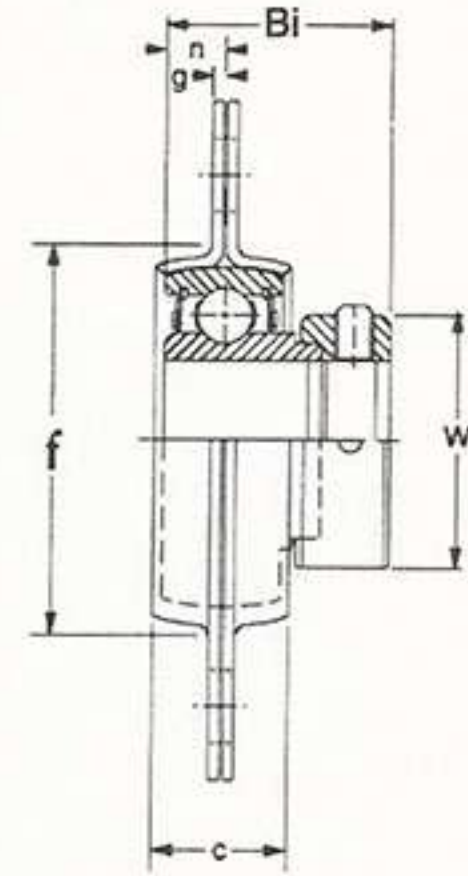

Unit No.	Shaft Dia.		Dimensions inch / mm									Bolt Size	Bearing No.	Housing No.	Weight Lbs kg
	In.	mm	a	e	g	c	s	f	Bi	n	W				
SAPF 201-8 202-10	1/2 5/8		3-3/16 81	2-33/64 64	0.079 2	9/16 14	9/32 7	1.59/64 49	1.126 28.6	0.236 6	1-1/8 28.6	1/4 M6	SA 201-8 202-10	PF203	0.68 0.31
SAPF 204 204-12	3/4	20	3-35/64 90	2-51/64 71	0.083 2.1	5/8 16	11/32 9	2-7/32 56	1.220 31.0	0.276 7.0	1-1/4 32.0	5/16 M8	SA 204 204-12	PF204	0.77 0.35
SAPF 205 205-14 205-15 205-16	7/8 15/16 1	25	3-3/4 95	2-63/64 76	0.083 2.1	21/32 17	11/32 9	2-19/32 66	1.220 31.0	0.295 7.5	1-1/2 38.1	5/16 M8	SA 205 205-14 205-15 205-16	PF205	0.88 0.40
SAPF 206 206-17 206-18 206-19 206-20	1-1/16 1-1/8 1-3/16 1-1/4S	30	4-7/16 113	3-35/64 90	0.102 2.6	21/32 17	13/32 10	2-51/64 71	1.406 35.7	0.315 8.0	1-3/4 44.5	3/8 M10	SA 206 206-17 206-18 206-19 206-20	PF206	1.50 0.68
SAPF 207 207-20 207-21 207-22 207-23	1-1/4 1-5/16 1-3/8 1-7/16	35	4-13/16 122	3-15/16 100	0.102 2.6	3/4 19	13/32 10	3-3/16 81	1.531 38.9	0.335 8.5	2-15/64 56.6	3/8 M10	SA 207 207-20 207-21 207-22 207-23	PF207	1.85 0.84
SAPF 208 208-24 208-25	1-1/2 1-9/16	40	5-13/16 148	4-11/16 119	0.134 3.4	13/16 21	1/2 13	3-35/64 90	1.720 43.7	0.354 9.0	2-3/8 60.4	1/2 M14	SA 208 208-24 208-25	PF208	2.86 1.3
SAPF 209 209-26 209-27 209-28	1-5/8 1-11/16 1-3/4	45	5-55/64 149	4-49/64 121	0.134 3.4	7/8 22	1/2 13	3-13/16 97	1.720 43.7	0.374 9.5	2-1/2 63.5	1/2 M14	SA 209 209-26 209-27 209-28	PF209	3.74 1.7
SAPF 210 210-30 210-31 210-32	1-7/8 1-15/16 2S	50	6-3/16 156	5 127	0.150 3.8	7/8 22	1/2 13	4-1/64 102	1.720 43.7	0.394 10.0	2-3/4 69.9	1/2 M14	SA 210 210-30 210-31 210-32	PF210	4.40 2.0